

**20
22**



COMMERCIAL TIRES



GITI TIRE AT A GLANCE

CUSTOMERS IN MORE THAN 130 COUNTRIES. THAN 60 YEARS



5

R&D and Testing Centers
4 R&D in Germany, USA, China, Indonesia,
and 1 testing center in UK



8

Manufacturing Plants
6 in China, 1 in Indonesia
1 in the US (starting in 2017)



12

Singapore, Indonesia, Malaysia, China, U.S.,
Canada, U.K., Germany, France, and Brazil



More than
33,000


Employees
Worldwide



More than
70,000

Points of Sale
In more than 130 countries

A Strong Presence All Around the World

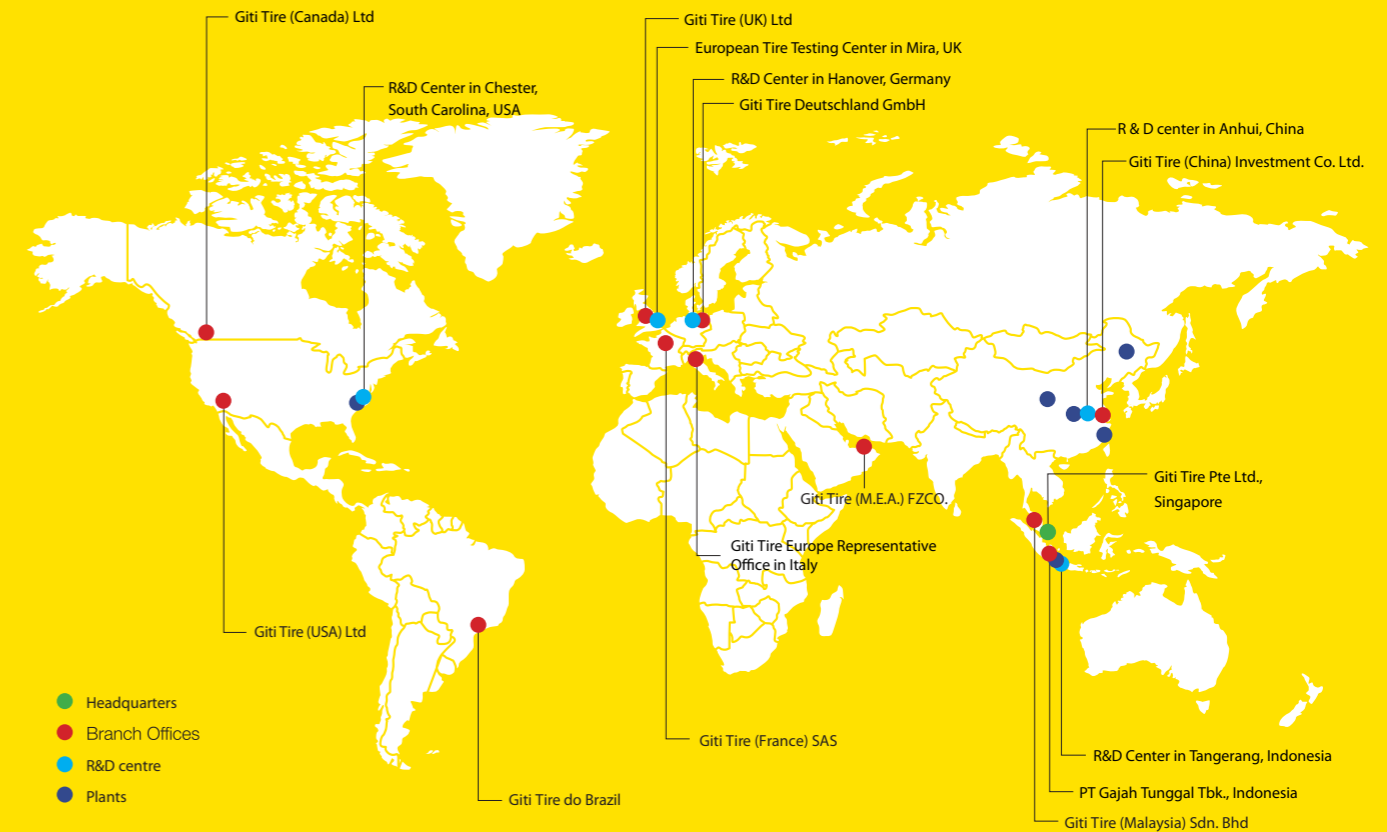

Only for trailer and head tractor



GAR863



Applicable Road



REGIONAL




REGIONAL



HIGHWAY

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	18PR	149/146	M	8.25	3150/2900	850/850	18.7	1050	279
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	18.7	1085	300

GSR237

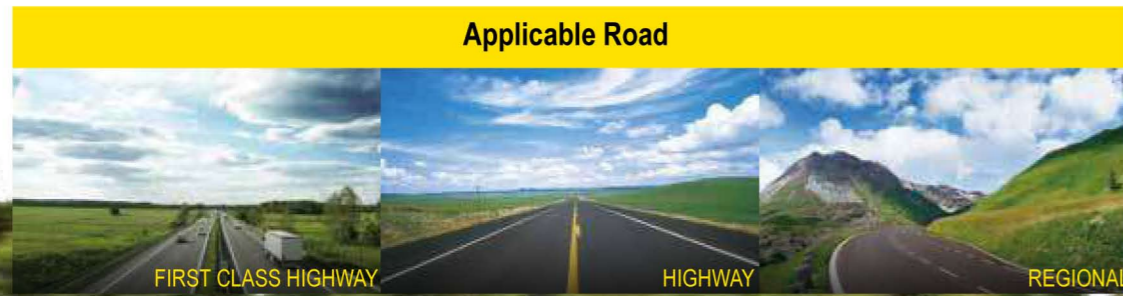

Only for trailer and head tractor



PDT 3.0



ISOM



CEM



LCT





Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
10.00R20	18PR	149/146	K	7.50	3250/3000	930/930	16.0	1054	278
11R22.5	18PR	149/146	M	8.25	3250/3000	930/930	16.0	1054	279
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	17.5	1085	300
295/60R22.5	18PR	150/147	L	9.00	3350/3075	900/900	15.0	926	292
295/80R22.5	18PR	154/149	M	9.00	3750/3250	850/850	16.5	1044	298



GSR230

Only for trailer and head tractor




- WEAR RESISTANT
- IMPROVES FOOTPRINT PERFORMANCE TO PREVENT IRREGULAR WEAR
- OPTIMIZED SIPE DESIGN ON RIB EDGES

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	16.0	1085	300

GTR937

Only for trailer and head tractor



- INCREASES CASING AND TREAD STIFFNESS
- MINIMIZING TIRE DEFORMATION FOR LONGER WEAR
- SPECIALLY FORMULATED TREAD COMPOUND
- IMPROVED TREAD WEAR RESISTANCE

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	15.0	1085	300

GAR827A

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	16PR	148/145	K	8.25	3150/2900	850/850	17.2	1050	279
11.00R20	16PR	150/147	K	8.00	3350/3075	830/830	17.2	1085	293

GAL836(+)

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	16PR	146/143	M	8.25	3000/2725	830/830	15.3	1054	279
12R22.5	12PR	143/141	M	9.00	2725/2575	620/620	15.8	1085	300
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	15.8	1085	300
295/80R22.5	18PR	152/149	M	9.00	3550/3250	900/900	15.5	1044	298
315/80R22.5	18PR	154/151	M	9.00	3750/3450	830/830	16.8	1076	312

GSR225

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
295/80R22.5	18PR	152/149	M	9.00	3750/3450	850/850	16.8	1044	298
11R22.5	16PR	148/145	M	8.25	3150/2900	850/850	15.3	1050	279
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	15.8	1085	300

GDL627



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	17.2	1085	300

GDR655



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	16PR	148/145	M	8.25	3150/2900	850/850	21.0	1050	279
315/70R22.5	20PR	154/150(152/148)	L(M)	9.00	3750/3350	900/900	21.0	1014	312

GDL617



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
295/60R22.5	18PR	150/147(149/146)	K(L)	9.00	3350/3075	900/900	18.2	932	292
315/60R22.5	18PR	152/148	L	9.75	3550/3150	900/900	18.2	950	313

GDR672



Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	23	1085	300

GDL636 (+)



Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	24.0	1096	300
295/80R22.5	18PR	152/149	M	9.00	3550/3250	900/900	21.1	1050	298
315/80R22.5	18PR	154/151	M	9.00	3750/3450	830/830	21.0	1082	312

GT659+



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
295/60R22.5	18PR	150/147	L	9.00	3350/3075	900/900	20.0	932	292

GTL919



Only for trailer and head tractor




Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
215/75R17.5	16PR	136/134	J	6.00	2240/2120	900/900	12.5	767	211
235/75R17.5	16PR	143/141(146/146)	J(F)	6.75	2725/2575	860/860	13.0	797	233
245/70R17.5	18PR	143/141	J	7.50	2725/2575	875/875	13.0	789	248
245/70R19.5	18PR	141/140	J	7.50	2575/2500	860/860	14.0	839	248
265/70R19.5	18PR	143/141	J	7.50	2725/2575	850/850	14.5	867	262
285/70R19.5	18PR	150/148	J	8.25	3350/3150	900/900	14.0	895	283

GSR231FS



Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	16PR	148/145	L	8.25	3150/2900	850/850	16.5	1054	279
295/75R22.5	18PR	150/147	L	8.25	2800/2575	850/850	16.5	1013	297

GTL925



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
435/50R19.5	20PR	164	J	14.00	5000	900	12.9	931	438
445/45R19.5	22PR	164	J	14.00	5000	900	12.9	895	436

GTR927



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	12PR	143/141	M	9.00	2725/2575	620/620	15.0	1085	300
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	15.0	1085	300

GTR931



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	14.0	1085	300

GTR920



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	15.0	1085	300

GTR951



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	14.5	1085	300

GAR558 (+)



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
9R22.5	14PR	136/134	M	6.75	2240/2120	830/830	14.0	974	229
10R22.5	16PR	144/142	M	7.50	2800/2650	900/900	14.8	1019	254
11R22.5	16PR	148/145	M	8.25	3150/2900	850/850	15.8	1054	279
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	16.3	1085	300
8.25R20	16PR	139/137	K	6.50	2430/2300	930/930	14.0	974	236
9.00R20	16PR	144/142	K	7.00	2800/2650	900/900	14.5	1019	259
10.00R20	18PR	149/146	K	7.50	3250/3000	930/930	15.0	1054	278
11.00R20	18PR	152/149	K	8.00	3550/3250	930/930	15.3	1085	293

GT01



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
8.25R20	16PR	139/137	M	6.50	2430/2300	930/930	14.0	974	236
9.00R20	16PR	144/142	K	7.00	2800/2650	900/900	15.0	1019	259
10.00R20	16PR	146/143	K	7.50	3000/2725	830/830	16.0	1054	278
12.00R24	20PR	160/156	K	8.50	4500/4000	900/900	17.0	1226	313

GAL817



Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
9R22.5	14PR	136/134	M	6.75	2240/2120	830/830	13.8	974	229
10R22.5	16PR	144/142	M	7.50	2800/2650	900/900	14.8	1019	254
9.00R20	16PR	144/142	K	7.00	2800/2650	900/900	14.5	1019	259

GT276



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	17.2	1085	300

GT879



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	16PR	152/148	M	9.00	3550/3150	850/850	17.2	1085	300
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	17.2	1085	300



DURABLE AND
ANTI-EXPLOSIVE




GAM853 ★

Only for trailer and head tractor




GDM661 ★

Only for trailer and head tractor



- HIGH LOAD
- SPECIAL BEAD STRUCTURE
- SPECIAL NEW FORMULA



- SHOULDER STRUCTURE
- CARCASS CONTOUR OPTIMIZATION



- GITI LTE PATENTED VULCANIZATION TECHNOLOGY

	Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
GAM853 ★	12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	16.0	1125	315
GDM661 ★	12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	18.0	1125	315




DURABLE AND
ANTI-EXPLOSIVE



GDM670

Only for trailer and head tractor




- HIGH LOAD
- SPECIAL BEAD STRUCTURE
- SPECIAL NEW FORMULA



GDM677

Only for trailer and head tractor



- SHOULDER STRUCTURE
- CARCASS CONTOUR OPTIMIZATION



- GITI LITE PATENTED VULCANIZATION TECHNOLOGY

	Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
GDM670	11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	20.0	1096	293
	12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315
GDM677	11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	18.0	1096	293
	12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	19.0	1136	315

GDM625★

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	18.0	1085	293
12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	18.0	1125	315

GAM839★

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	16.0	1085	293
12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	16.0	1125	315

GDM606


 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
10.00R20	18PR	149/146	K	7.5	3250/3000	930/930	19.0	1065	278
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	20.0	1096	293
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315

GDM680

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	18.0	1085	300
8.25R20	16PR	139/137	K	6.5	2430/2300	930/930	15.8	974	236
9.00R20	16PR	144/142	K	7.0	2800/2650	900/900	16.8	1019	259
10.00R20	18PR	149/146	K	7.5	3250/3000	930/930	17.2	1065	278
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	18.0	1096	293
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	19.0	1136	315

GDM681/691

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315

GAM871

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	20PR	154/151	L	9.00	3750/3450	930/930	17.6	1085	300
13R22.5	20PR	156/153	L	9.75	4000/3650	930/930	16.5	1124	320



GAO202

Only for trailer and head tractor



● THE ENLARGED DRIVING SURFACE WIDTH AND THE NEW LARGE-BLOCK PATTERN DESIGN



● THE OPTIMIZED SIDEWALL PROFILE DESIGN KEEPS THE SIDEWALL STRAIGHT UNDER HEAVY LOAD



● SPECIAL SHOULDER PATTERN CONTOUR DESIGN OPTIMIZES THE GROUND CONTACT SURFACE AND GROUND PRESSURE DISTRIBUTION, PREVENTS SHOULDER VOIDS AND IMPROVES DURABILITY

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	E	8.5	4000/3650	900/900	23.5	1136	315

GAO852

Only for trailer and head tractor

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	F	8.0	3550/3250	930/930	24.0	1096	293
12.00R20	20PR	156/153	F	8.5	4000/3650	900/900	24.0	1136	315



GAO829

Only for trailer and head tractor

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
10.00R20	18PR	149/146	F	7.5	3250/3000	930/930	22.5	1065	278
11.00R20	18PR	152/149	F	8.0	3550/3250	930/930	23.0	1096	293
12.00R20	20PR	156/153	F	8.5	4000/3650	900/900	23.5	1136	315



GAO822

Only for trailer and head tractor

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	F	9.00	3550/3250	930/930	23.5	1096	300
11.00R20	18PR	152/149	F	8.0	3550/3250	930/930	23.5	1096	293
12.00R20	20PR	156/153	F	8.5	4000/3650	900/900	24.5	1136	315




GT855




Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	17.0	1085	293
12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	18.0	1125	315



GT835



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	15.5	1085	293
12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	17.0	1125	315



GAM851



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
445/65R22.5	20PR	169/-	K	13.00	5800	900	18.0	1150	444



GAU867^{V1}



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	18PR	149/146	J	8.25	3250/3000	930/930	18.7	1054	279
215/75R17.5	16PR	127/124	M	6.00	1750/1600	830/830	13.5	767	211
255/70R22.5	16PR	140/137	J	7.50	2500/2300	830/830	17.0	930	255
265/70R19.5	16PR	140/138	J	7.50	2500/2360	790/790	15.5	867	262
275/70R22.5	18PR	152/148	J	8.25	3550/3150	900/900	18.7	958	276
295/80R22.5	18PR	154/150	J	9.00	3750/3350	900/900	18.7	1050	298



GDM686



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/148	K	9.00	3550/3150	850/850	23.1	1085	300
315/80R22.5	20PR	158/150	K	9.00	4000/3350	850/850	23.1	1076	312



GDM616



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315



GDL651FS

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	14PR	144/142	L	8.25	2800/2650	900/900	20.6	1054	279
295/80R22.5	14PR	144/141	L	9.00	2800/2575	900/900	20.6	1021	298

GAM863





Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	K	9.00	3550/3250	930/930	18.7	1085	300
295/80R22.5	18PR	152/149	K	9.00	3550/3250	900/900	18.7	1050	298

GAM885

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	16.0	1085	293
12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	16.0	1125	315

GAR868S

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	15.0	1085	293

GDR671

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	K	9.00	3550/3250	930/930	19.5	1085	300

GSR256

 Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	17.5	1085	300

PAR883



Only for trailer and head tractor



Applicable Road



REGIONAL



REGIONAL



HIGHWAY

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	18.7	1085	300

PSR239



Only for trailer and head tractor



PDT 3.0



ISOM



CEM



LCT



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	18PR	149/146	M	8.25	3250/3000	930/930	16.0	1054	279
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	17.5	1085	300
295/60R22.5	18PR	150/147	L	9.00	3350/3075	900/900	15.0	926	292
295/80R22.5	18PR	152/149	M	9.00	3550/3250	900/900	16.5	1044	298




PAM853 ★

Only for trailer and head tractor




PDM661 ★

Only for trailer and head tractor



● HIGH LOAD

- SPECIAL BEAD STRUCTURE
- SPECIAL NEW FORMULA



● SHOULDER STRUCTURE

- CARCASS CONTOUR OPTIMIZATION



● GITI LTE PATENTED VULCANIZATION TECHNOLOGY

	Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
PAM853 ★	12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	16.0	1125	315
PDM661 ★	12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	18.0	1125	315



PDM608

Only for trailer and head tractor

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	18.0	1085	300
8.25R20	16PR	139/137	K	6.5	2430/2300	930/930	15.8	974	236
9.00R20	16PR	144/142	K	7.0	2800/2650	900/900	16.8	1019	259
10.00R20	18PR	149/146	K	7.5	3250/3000	930/930	17.2	1065	278
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	18.0	1096	293
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	19.0	1136	315



PAM872

Only for trailer and head tractor

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	20PR	154/151	L	9.00	3750/3450	930/930	17.6	1085	300
13R22.5	20PR	156/153	L	9.75	4000/3650	930/930	16.5	1124	320



PAM539 ★

Only for trailer and head tractor

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	16.0	1085	293
12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	16.0	1125	315



PAM853

Only for trailer and head tractor




PDM670

Only for trailer and head tractor




PDM677

Only for trailer and head tractor



- HIGH LOAD
- SPECIAL BEAD STRUCTURE
- SPECIAL NEW FORMULA



- SHOULDER STRUCTURE
- CARCASS CONTOUR OPTIMIZATION



- GITI LTE PATENTED VULCANIZATION TECHNOLOGY

	Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
PAM853	11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	16.0	1085	293
	12.00R20	20PR	156/153	K	8.5	4000/3650	900/900	16.0	1125	315
PDM670	11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	20.0	1096	293
	12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315
PDM677	11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	18.0	1096	293
	12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	19.0	1136	315

PDM693


Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315

PA0522

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	D	8.0	3550/3250	930/930	25.0	1096	293
12.00R20	20PR	156/153	D	8.5	4000/3650	900/900	25.0	1136	315

PDM606

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
10.00R20	18PR	149/146	K	7.5	3250/3000	930/930	19.0	1065	278
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	20.0	1096	293
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315

PW215N

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	16PR	150/147	K	8.0	3350/3075	830/830	16.5	1085	293

PDM616

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	F	8.5	4000/3650	900/900	23.5	1136	315

PDM682

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	J	8.5	4000/3650	900/900	20.0	1136	315

PSR125



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
315/70R22.5	20PR	156/150(154/150)	L(M)	9.00	4000/3350	900/900	15.5	1014	312

PW126

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	F	8.0	3550/3250	930/930	23.5	1096	293
12.00R20	20PR	156/153	F	8.5	4000/3650	900/900	24.5	1136	315



PAO880

Only for trailer and head tractor



● THE ENLARGED DRIVING SURFACE WIDTH AND THE NEW LARGE-BLOCK PATTERN DESIGN



● THE OPTIMIZED SIDEWALL PROFILE DESIGN KEEPS THE SIDEWALL STRAIGHT UNDER HEAVY LOAD



● SPECIAL SHOULDER PATTERN CONTOUR DESIGN OPTIMIZES THE GROUND CONTACT SURFACE AND GROUND PRESSURE DISTRIBUTION, PREVENTS SHOULDER VOIDS AND IMPROVES DURABILITY

Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12.00R20	20PR	156/153	E	8.5	4000/3650	900/900	23.5	1136	315

PAL556 (+)

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	16PR	146/143	M	8.25	3000/2725	830/830	15.3	1054	279
12R22.5	18PR	152/149	L	9.00	3550/3250	930/930	15.8	1085	300
245/70R19.5	18PR	141/140	M	7.50	2575/2500	860/860	14.0	839	248
275/70R22.5	18PR	148/145(152/148)	M(J)	8.25	3150/2900	900/900	15.0	958	276
295/60R22.5	18PR	150/147	L	9.00	3350/3075	900/900	15.0	926	292
295/80R22.5	18PR	152/149	M	9.00	3550/3250	900/900	15.5	1044	298

PW825 (+)

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	F	9.00	3550/3250	930/930	23.5	1096	300

PAL525

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11R22.5	18PR	149/146	M	8.25	3250/3000	930/930	14.5	1054	279
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	14.5	1085	300

PSR756

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
12R22.5	18PR	152/149	M	9.00	3550/3250	930/930	17.5	1085	300

GA50

Only for trailer and head tractor



Size	PR	Load Index	Speed Rating	Measure Rim	Max. Load (kg) Single/Dual	Max. Inflation Pressure(kPa) Single/Dual	Tread Depth (mm)	O.D (mm)	Section Width (mm)
11.00R20	18PR	152/149	K	8.0	3550/3250	930/930	15.5	1085	293



